

OptiCare

The integrated mattress for ICU


Optimising patient care

The Optimisation Detection System utilises 6 immersion sensors which detect the patient's weight, height and position on the mattress, and automatically adjusts mattress pressures for optimum performance.

- Fully integrated into the Multicare or Eleganza 5 bed frame with no external compressor.
- Superior immersion and envelopment for the patient.



immersion



envelopment



Heel zone

Made up of 2 foam air cells, each with a specially-designed internal foam shape that allows the two cells to retract when the bed frame is shortened.

- Reduces the length of the mattress by 19 cm.
- 7-degree heel slope with a softer foam that gives the patient enhanced comfort and significantly reduces the risk of heel pressure ulcers.



Microclimate Management (MCM)

OptiCare helps maintain natural thermoregulation by circulating air through the mattress surface.

- 50 litres per minute.
- Unobstructed air delivery system.
- Tri-directional.



MCM

Mattress covers

LINET offers 3 covers to fit the OptiCare mattress, allowing you to choose the perfect cover based on patient requirements. All of the covers have a full 360-degree zip for easy removal for cleaning or replacement.




Optimised



Micro-Climate



Waterproof

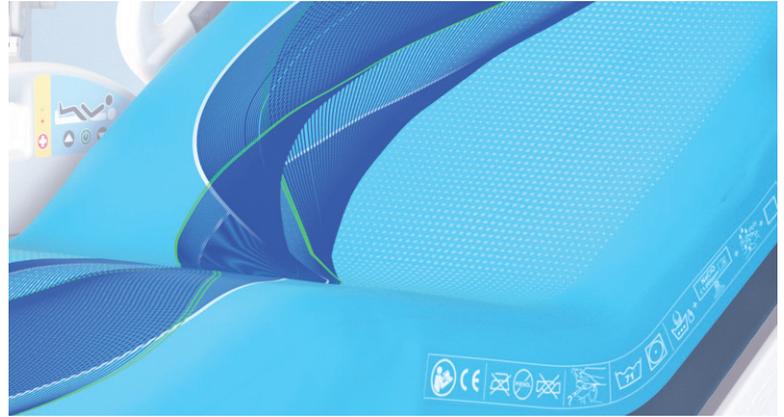

OptiCover Premier

This cover is made of durable Dartex material.

- Water-resistant but with high vapour permeability enabling great Microclimate Management performance.
- The restricted slip material prevents patients from sliding down the mattress.



Restricted Slip

OptiCover Endurance

The variant with durable cover in a dark-blue design.

- Water-resistant but with lower vapour permeability.
- The medium slip material makes it easier to reposition the patient when slide sheets are not in use.



Medium Slip

OptiCover H-MCM

A very smooth cover which can be used for patients who needs to be repositioned frequently or where Microclimate Management is very important.

- Water-resistant but very high vapour permeability.



High Slip

TECHNICAL SPECIFICATIONS

Safe working load	250 kg	Max. inflation	After 30 minutes, returns back to OPT
Length	214 cm	Microclimate Management modes	High, low, off
Width	86 cm	CPR	1-button CPR, automatic inflation after 60 minutes
Height	22 cm	Transport mode	Yes
Weight	10 kg		

wissner-
bosserhoff



Members of LINET Group

LINET spol. s r.o.

Želevčice 5 | 274 01 Slaný | Czech Republic

tel.: +420 312 576 400 | fax: +420 312 522 668 | e-mail: info@linet.com | www.linet.com

